

NOTE: Truncated edge to face adjacent vehicular accessway.

### TYPICAL SECTION


### TYPICAL ELEVATION

### SPECIFICATION NOTES

1. All timber to be Durability Class 1 H.W. timber F14, cut free from sapwood.
2. All timber to be CCA treated.
3. Ensure smooth surface, free from splinters to all external, timber faces, edges and charniers.
4. Apply 5mm chamfer to all edges.
5. Where coloured finish is required, paint timber with 1 no. coat of oil based primer & 2 no. coats of approved acrylic exterior paint, colour as specified.
6. Where natural finish is required paint all timber with 1 no. coat of approved clear water repellent, following fabrication. Following construction, paint assembly with 1 no. coat of the same.
7. Set-out: Install at equal centres (1500mm. min. - 1800mm. max.)

Issue	Description	Date	By	Appd.	Issue
A	Original Issue	1/21/2007	C.A.	V.B.	

Drawn:	C.A.
Checked:	D.M.
Approved:	

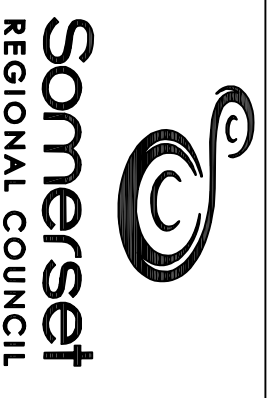

**SOMERSET REGIONAL COUNCIL**  
**TIMBER BOLLARD**

Drawing No. SRC-LS-010

Current Issue  
**A**